


SLOPE APPLICATION LIMITED TO  
MANUFACTURER'S RECOMMENDATIONS.  
APPROVAL TO BE OBTAINED FOR SLOPES  
OVER 2:1 FOR STABILITY.

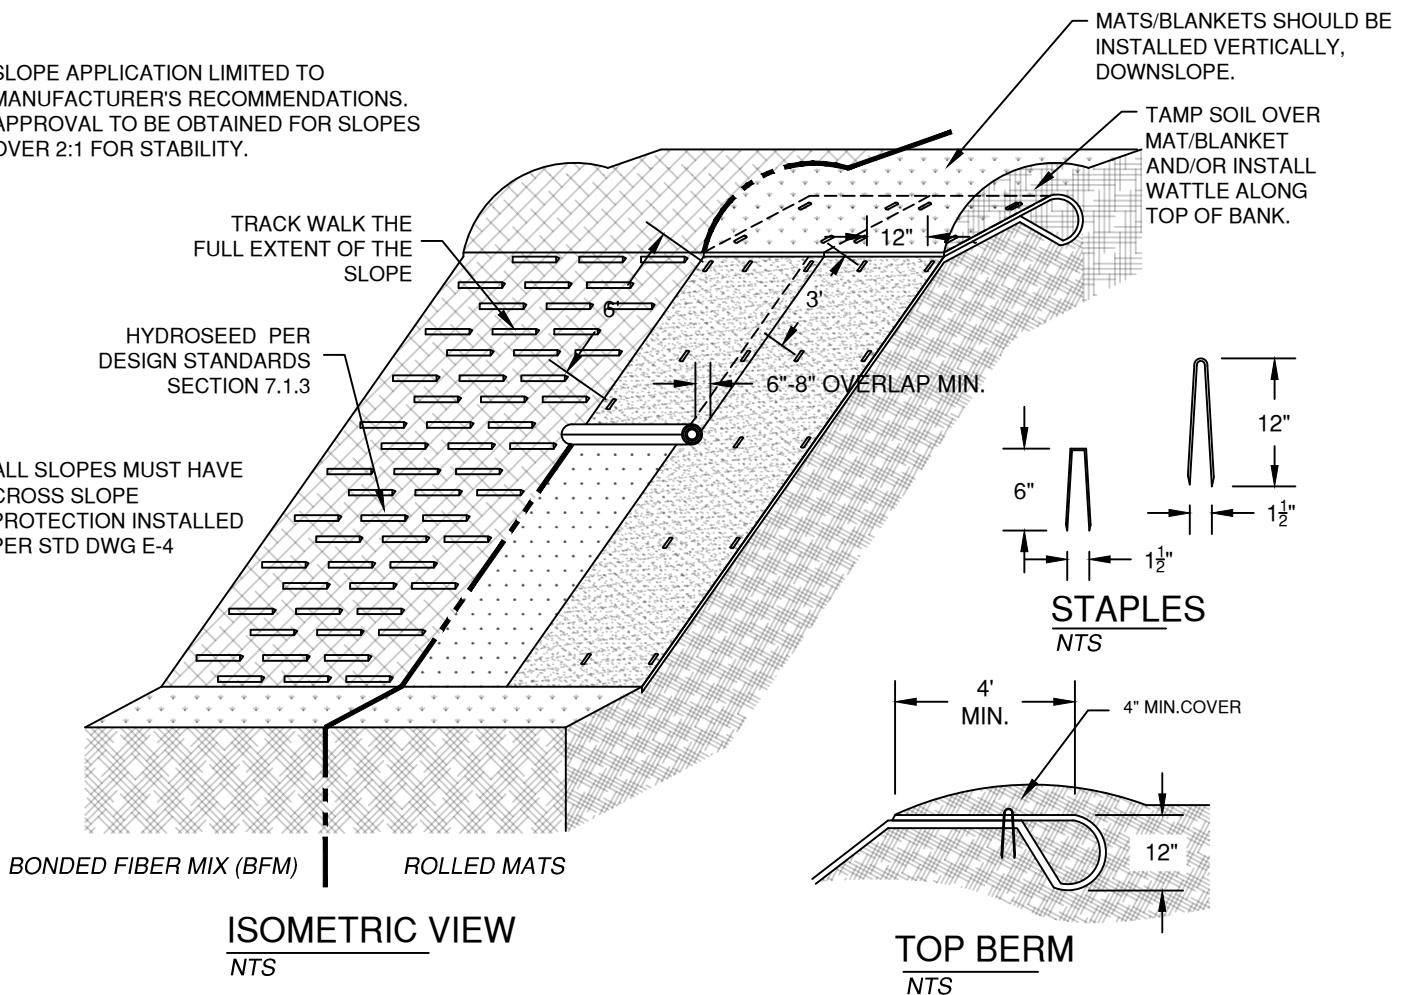

NOTES:

- PRIOR TO A SITE'S FINAL APPROVAL, ALL DISTURBED STEEP SLOPES MUST BE TREATED FOR LONG-TERM EROSION CONTROL. DISTURBED SOIL OF LESSER SLOPE SHALL BE STABILIZED AND TREATED IF SOIL HAS THE POTENTIAL TO LEAVE THE SITE OR ENTER A STORM DRAIN SYSTEM.
- SLOPE SURFACE SHALL BE FREE OF ROCKS, CLODS OR LARGE ORGANIC DEBRIS. MATS/BLANKETS SHALL BE HAVE GOOD SOIL CONTACT.
- APPLY PERMANENT SEEDING BEFORE PLACING MATS/BLANKETS.
- LAY BLANKETS LOOSELY AND STAKE/STAPLE TO MAINTAIN DIRECT CONTACT WITH SOIL. DO NOT STRETCH.
- MINIMUM STAKING OR STAPLING LAYOUT PATTERN - SEE MANUFACTURERS SPECIFICATIONS. USE 6-INCH STAPLES ON COMPAKTED SOILS AND 12-INCH STAPLES ON LOOSE SOILS.

INSPECTION AND MAINTENANCE:

- INSPECT WEEKLY AND DAILY DURING STORM EVENTS.
- REPAIR ANY DAMAGED AREA OF THE MAT, BLANKET OR BFM. MAINTAIN OR PROVIDE ADDITIONAL ANCHORS AS NECESSARY TO MAINTAIN GROUND CONTACT.
- IF EROSION OCCURS, REPAIR AND PROTECT THE ERODED AREA. ADDITIONAL CROSS SLOPE PROTECTION MAY BE REQUIRED.

DRAWN	CJH	 <b>CITY OF BEND</b>
DIV	EROSION	
REV	DATE	

**CITY OF BEND**

STANDARD DRAWING

710 NW WALL ST., BEND, OREGON 97701

**SLOPE STABILIZATION**

SCALE NTS

DATE 11/01/2024

APPR

STD DWG E-5B