



INSTALLATION IN NEW CONSTRUCTION

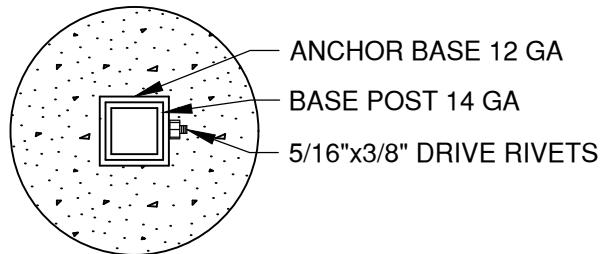

SECTION A-A

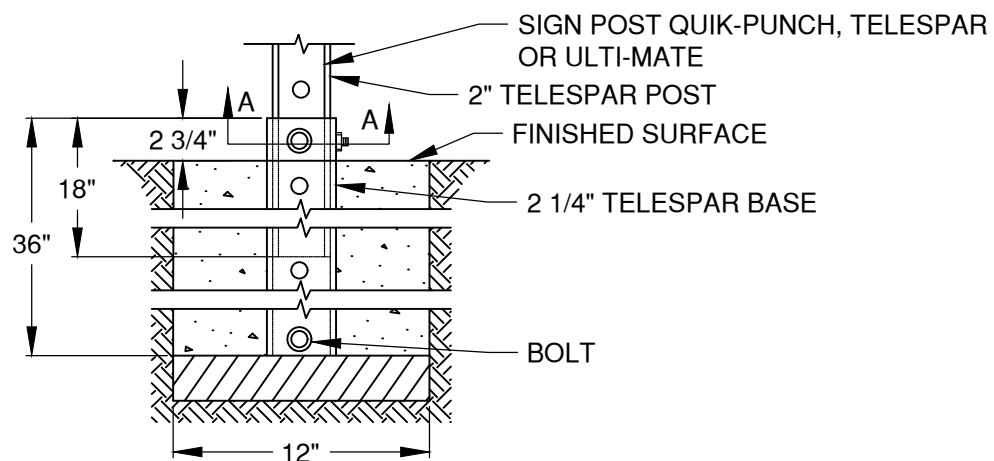

ANCHOR BASE DETAIL

NOTES:

1. USE PSST ANCHOR BASE FOUNDATION FOR ALL SIGN LOCATIONS OTHER THAN IN MEDIAN AND ROUNDABOUT SPLITTER ISLANDS PER STD DWG R-7A.
2. ANCHOR BASE HOLES AND BOTTOM OF ANCHOR BASE SHALL BE COVERED SO THAT CONCRETE DOES NOT SEEP INTO ANCHOR BASE DURING SETTING
3. BASE SHOULD BE SET SEPARATELY FROM POST WITH ANCHOR BOLT IN BASE BOTTOM ONLY
4. POST SHOULD BE ABLE TO SLIDE FREELY WHEN RIVET IS REMOVED
5. FOR LARGE SIGNS THAT EXCEED WINDLOADS 2 1/2" POSTS MAY BE APPROVED BY CITY ENGINEER

DRAWN	AJD	 CITY OF BEND	CITY OF BEND STANDARD DRAWING 710 NW WALL ST., BEND, OREGON 97701	SCALE	NTS
DIV	ROADWAY			DATE	01/31/2022
REV	DATE			APPR	
				STD DWG	R-7