



**STANDARD CROSSWALK**  
**TWO 1' WHITE BARS**

### Install per Standard Drawing R-47

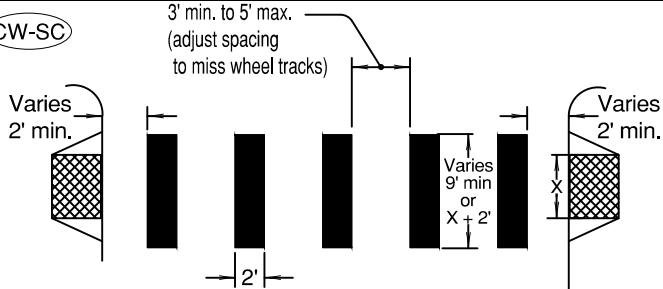


## STAGGERED CONTINENTAL CROSSWALK 2' WHITE BARS

Install per standard drawing R-47; Install as Type B-HS preformed thermoplastic;  
Install at uncontrolled approach

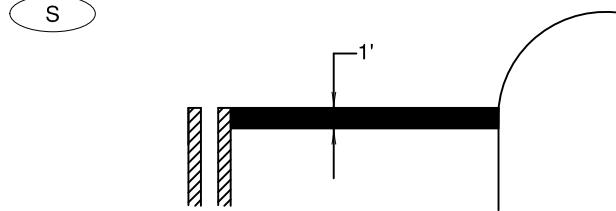


STOP BAR  
1' WHITE BAR

Install stop bar in Thermoplastic. Install per Standard Drawing R-45

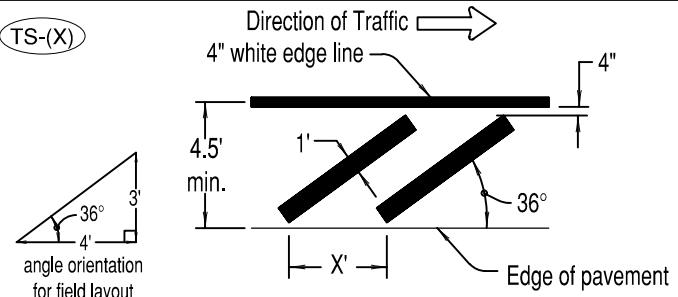


**TRANSVERSE SHOULDER BARS**  
**1' WHITE BARS AT 20' SPACING**

X = 20', Typical  
(40' spacing may be used where median length exceeds 200')

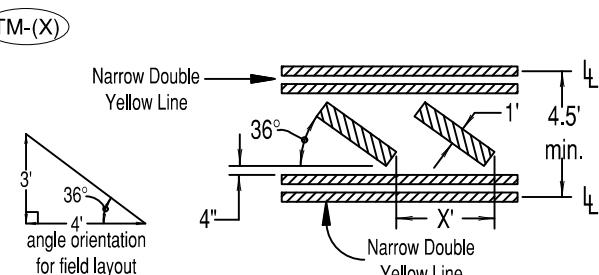


TRANSVERSE MEDIAN BARS  
1' YELLOW BARS AT 20' SPACING

X = 20', Typical  
(40' spacing may be used where median length exceeds 200')

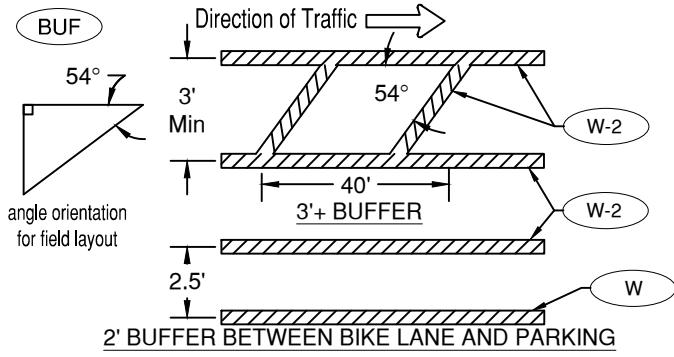

Install buffer stripes in thermoplastic / horizontal stripes parallel with traffic in paint

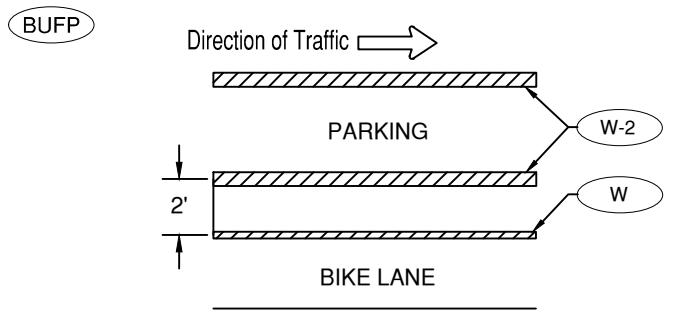

## PARKING PROTECTED BIKE LANE

DRAWN	AJD
DIV	ROADWAY
REV	DATE



## CITY OF BEND

## CITY OF BEND

## STANDARD DRAWING

710 NW WALL ST., BEND, OREGON 97701

## PAVEMENT MARKINGS

SCALE NTS

DATE 01/31/2022

APPR

STD DWG R-42A