


STAGGERED CONTINENTAL LAYOUT

General Note:

1. Install crosswalk bars such that the throat of the ADA ramp is entirely within crosswalk markings, or 5' back of extended fog line, edge of pavement, or curb face.

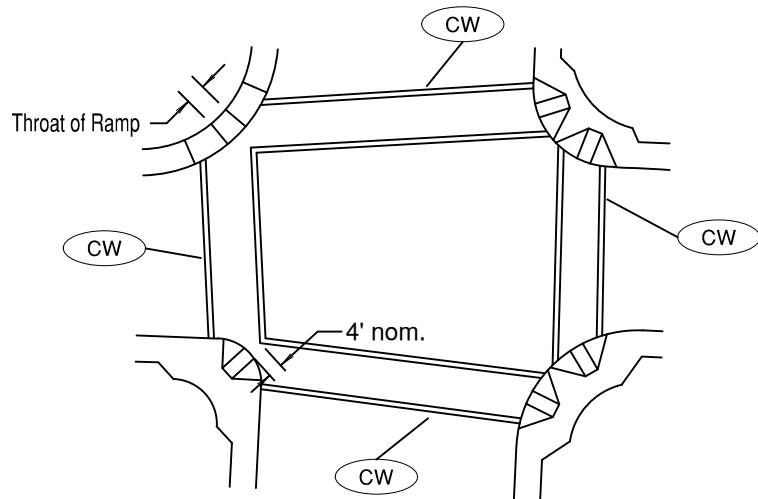

STANDARD CROSSWALK BARS AT 4-WAY CONTROLLED INTERSECTION

To be accompanied by Standard Dwg. Nos. R-40 thru R-43

DRAWN	AJD	 CITY OF BEND	CITY OF BEND STANDARD DRAWING 710 NW WALL ST., BEND, OREGON 97701	SCALE	NTS
DIV	ROADWAY			DATE	01/31/2022
REV	DATE	CITY OF BEND	CROSSWALK MARKINGS	APPR	
				STD DWG	R-47