


1. PROTECTION FENCING MUST:
  - 1.1. BE INSTALLED PRIOR TO ANY GRADING AND/OR SITE IMPROVEMENTS. FENCING TO BE MAINTAINED UNTIL THE GRADING PERMIT / SITE PERMIT IS COMPLETE.
  - 1.2. TREE PROTECTION METHODS MUST BE CONSISTENT WITH INTERNATIONAL SOCIETY OF ARBORICULTURE (ISA) BEST MANAGEMENT PRACTICES.
  - 1.3. PROTECTION FENCING MUST BE INSTALLED AT THE EDGE OF THE ROOT PROJECTION ZONE AND PERMISSIBLE ENCROACHMENT AREA. EXISTING STRUCTURES AND/OR SECURE FENCING AT LEAST 3.3 FEET TALL CAN SERVE AS THE REQUIRED PROTECTION FENCING.
  - 1.4. SIGNAGE DESIGNATING THE PROTECTION ZONE AND PENALTIES FOR VIOLATIONS MUST BE SECURED ON EACH FENCE AS REQUIRED BY THE BDC.
  - 1.5. FENCING IS TO BE INSPECTED WEEKLY OR AFTER HIGH WINDS. REPAIR AS NEEDED TO ENSURE CONFORMANCE.
2. ANY LANDSCAPING OR IRRIGATION APPROVED WITHIN THE ROOT PROTECTION ZONE MAY BE INSTALLED BEFORE OR AFTER THE REMOVAL OF THE PROTECTION FENCING AND MUST NOT DISTURB EXISTING TREES, INCLUDING ROOTS, WITHIN THE ROOT PROTECTION ZONE.
3. NO EQUIPMENT SHALL OPERATE INSIDE THE PROTECTION FENCING. AREA WITHIN THE FENCING WILL NOT BE USED FOR STAGING OR STORAGE.

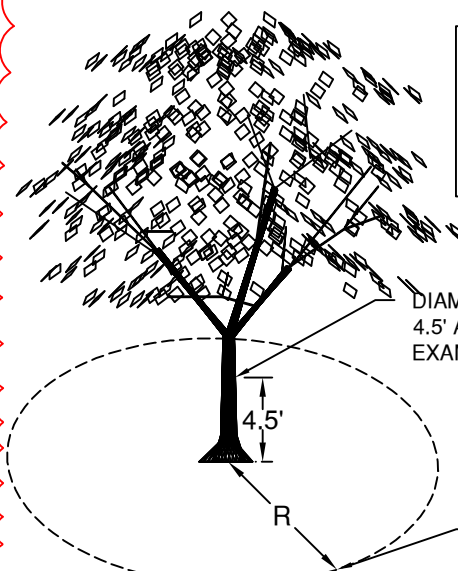

FENCE IS TO BE LOCATED AT THE ROOT PROTECTION ZONE. THIS MAY OR MAY NOT EXCEED THE TREE'S DRIP LINE, DEPENDENT ON THE TREE SIZE AT DBH.

MINOR ENCROACHMENT INTO THE RPZ WILL BE CONSIDERED WHERE IDENTIFIED IN AND APPROVED DURING PERMIT REVIEW.

DRAWN CJH	
BY	EROSION
REV	DATE



CITY OF BEND

CITY OF BEND

STANDARD DRAWING

710 NW WALL ST., BEND, OREGON 97701

TREE/VEGETATION PROTECTION FENCING

SCALE NTS
DATE 11/01/2024
APPR
STD DWG E-3